

Stenhøj Mascot 1.30 & 1.32

2-post electro-mechanical lifts

Mascot lifts are especially suitable for all kinds of repairs that require free access to underbody and wheels. The Mascot lifts are available with 3.0 and 3.2 t lifting capacities.

Features:

Top safety

- nut breakage system
- chain breakage system
- obstruction system
- automatic arm lock system

Elegant control box

 with dead-man controls and separate main switch.

Arms can be parallel-parked

- advantage when having to lift vehicles with very short wheel base
- easy and quick positioning of arms to lifting points of vehicle.

Lifting height

S-models: 2050 mmC-models: 2240 mm








Stenhøj Mascot 1.30 & 1.32



Suitable for repair jobs that require free access to underbody and wheels.



Asymmetric design and angle-set posts allow car doors to be opened freely.



S = screw pad



C = combi pad



F = flex pad Delivery of a F-version includes besides the standard flex pads an extra set of 190 mm flex pads.



CF = combiflex pad Delivery of a CF-version includes besides the standard combiflex pads an extra set of 260 mm flex pads.

Long life construction

 the lowest operation and maintenance costs on the market.

Reliable and easy to operate

adapted to the mechanic's requirements.

Very low minimum height

• only 105 mm on S-models.

Mascot

- is rated according to BS AU 161.
- Sturdy and dependable.
- Quick, easy installation and very little maintenance.



Internal carriage - good load distribution on nut and spindle.

Quality to the last detail

- cold-rolled, centred spindle with long long life - quadrupled compared to current constructions.
- 6 large guiding wheels in lubrication-free needle bearings.
- the most durable nut set on the market.
- obstruction system.
- internal automatic arm locking device.



Internal arm locking system that is automatically released in bottom position. Stable axle construction prevents deflection.



Auxiliary ramps for base frames- to be ordered separately.




Rubber covers for posts - to be ordered separately.



A large program of various pads - among these flex pads in different heights.

Stenhøj Mascot 1.30 & 1.32

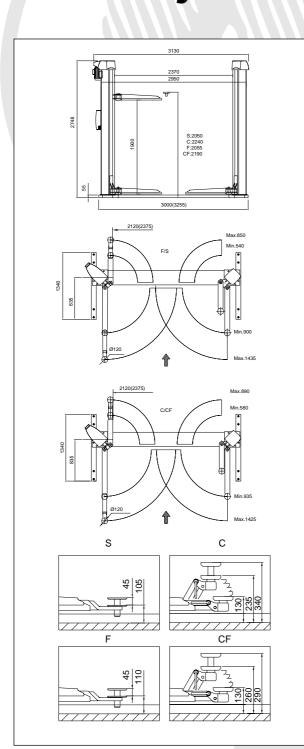

Technical data: Mascot 1.30 Mascot 1.32

Lifting capacity: 3000 kg 3200 kg Lifting time: 45 sec. 55 sec. Motor: 2.2 kW 2.2 kW

Optional extras for all models:

Expansion bolts, rubber covers, auxiliary ramps, automatic lubrication, a large program of special pads developed in cooperation with leading car manufacturers.

Optional extras, F- & CF-models only:

ø120 flex pad (30-60 mm), ø160 mm flex pad (90-150 mm), ø160 flex pad (150-255 mm), 100 mm flex pad, 190 mm flex pad, 260 mm flex pad.

Optional extras, S-models only:

100 mm, 190 mm and 260 mm pad sets.

Corrosion-proof surface treatment

All Stenhøj lifts are led through a sling purifying plant (according to SA2.50 - ISO-Norm 8501-1:1988), dipped in primer, and finally led through an electro-static powder bake plant.

Standard colours:

Red RAL 3013 White RAL 9002. Special colour combinations on request.

Identification of a Mascot lift:

First digit (1) = number of motors Last two digits (e.g. 30) = capacity in 100 kg Letters:

S = screw pad

F = flex pad

C = combi pad

CF = combiflex pad

No liability accepted for specifications, which are subject to alteration.